

NR-4016SFP

155M/1.25G SFP 8포트 + 10/100/1000Mbps 이더넷 8포트

18

L2 스위치 NURHING



- 광포트 : 155M/1.25G SFP 8포트
- 이더넷포트 : 10/100/1000Mbps 이더넷 8포트
- 주요기능 : VLAN, LACP, IGMP(v1/v2), QOS, ACL, DFCP, SNMP(v1/v2/v3), STP/RSTP/MSTP 지원
- 국제 표준 링프로토콜 ERPS (G.8032) 지원

사양 Specification

포트정보

- 10/100/1000Mbps 이더넷 8포트
- 155M/1.25Gbps SFP 8포트 (2.5G Turbo Over clocking)
- RS232 콘솔지원 (115,200/N,8,1)

Network Protocol

- IEEE802.3 10Base-T, IEEE802.3i 10Base-T
- IEEE802.3u 100Base-TX, IEEE802.3ab 1000Base-T
- IEEE802.3z 1000Base-X, IEEE802.3x

하드웨어 사양

- Switching Capacity : 52Gbps
- Forwarding Rate@64byte : 23.81Mpps
- MAC : 8K
- Buffer Memory : 6M
- Jumbo Frame : 9.6K


공급전원 및 기타사항

- 100~240VAC(60Hz)
- 소비전력 8W / Full 18W
- 동작온도 - 20~60℃ (습도90%)이슬이생기지않을것
- 보관온도 - 40~75℃ (습도95%)이슬이생기지않을것
- 서지보호 4kV 8/20us
- 사이즈(L*W*H) 270*181*44.5mm
- 무게 1.2kg(1.7kg)

L2 매니지먼트

- VLAN: VoiceVLAN, QinQ configuration, 4KV VLAN based on port, IEEE802.1q, Port configuration of Access, Trunk, Hybrid
- LACP, Static aggregation, Max 8 aggregation groups and 8 ports per group.
- STP (IEEE802.1d), RSTP (IEEE802.1w), MSTP (IEEE802.1s)
- G.8032 (ERPS), Recovery time less than 20ms
- MLD Snooping v1/v2, Multicast VLAN, IGMP Snooping v1/v2, Max 1024 multicast groups
- Port Mirroring: Bidirectional data mirroring based on port
- QoS: 802.1p/DSCP priority mapping, Diff-Serv QoS, Priority Mark/Remark, Queue Scheduling Algorithm (SP, WRR, SP+WRR)
- ACL: Port-based Issuing ACL, ACL based on port and VLAN, L2 to L4 packet filtering, matching first 80 bytes message. Provide ACL based on MAC, Destination MAC address, IP Source, Destination IP, IP Protocol Type, TCP/UDP Port, TCP/UDP Port Range, and VLAN
- Security: IP-MAC-VLAN-Port binding, ARP inspection, Anti-DoS attack, AAA & RADIUS, MAC learning limit, IEEE 802.1X & MAC address authentication, Broadcast storm control, Backup for host datum, SSH 2.0, SSL, Port isolation, ARP message speed limit, User hierarchical management and password protection
- LLDP, HTTPS, NTP, Console/AUX Modem/Telnet/SSH2.0 CLI, FTP, TFTP, Xmodem, SFTP

시스템 구성도

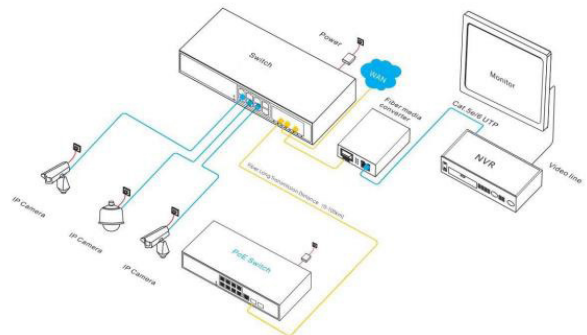

외관도

